

DMX Tecnologias

LARGE LED Display Screen

Detailed System Connection and Accesories

www.displaysled.com

Por: Alfredo Olivares

Reference Pictures



1. Level the base of the cabinets on the floor.
2. Adjust the screws.
3. Place the other cabinets on top.
4. Fix the cabinets with the metal plates.



Power Cables



1. Place the power cable in the lower power outlet (use every two cabinets one cable)
2. Power connection between two cabinets.



LED Display Controller DBT-Q2007



USB Port

RJ45 to HUB

DVI entrance to PC

Power Cable

Connection Finished



LED Display Controller to HUB Card

First Hub Card


Second Hub Card

LED Display Controller




RJ45 Cable

RJ45 Cable

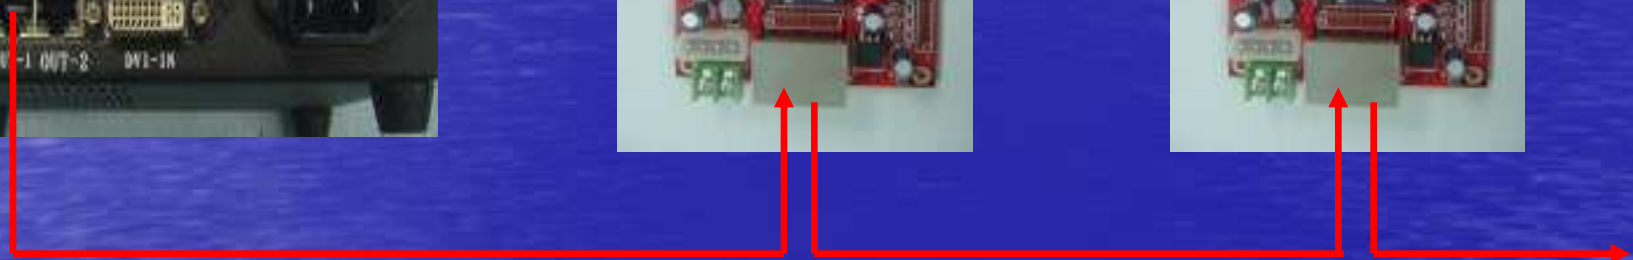

HUB Card

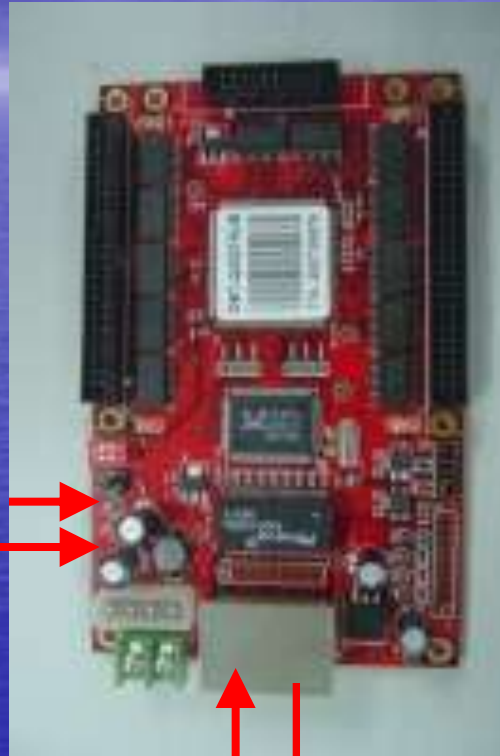

Green LED flashes in normal state

Red LED indicates ON state

RJ45 signal IN


Coming inwards from previous Hub

RJ45 signal OUT

Connection to next Hub

Hub Card to Module

LED Module



20 pin IDE Connection
The side with the red line has to point inside.



Hub converter



50 pin IDE connection
The red line has to point downwards.

Hub Card



Connection Terminated

